

- 4=1/4X1 TORX SCREWS-A
- 2=5/16 LOCK NUTS-B
- 4=5/16 USS WASHERS-C
- 2=5/16 X 2 3/4" BOLTS-D




# # BG-32W

KAWASAKI TERYX 750 4X4



**MUST REMOVE THE STOCK PLASTIC GUARD TO INSTALL THE NEW METAL BUMPER.**

**BECAUSE OF THE ANGLES OF THE BUMPER, THE BUMPER LOOKS TO BE A LITTLE SHORT ON THE ENDS BUT IT WILL FIT. PLACE ONE END OVER THE TUBE AND PUSH ON THE CENTER OF THE BUMPER TO SPREAD IT OPEN TO SLIDE OVER THE OTHER CORNER. THE BUMPER WILL FIT EASIER IF THE 1 1/2" ROUND PLUGS ARE REMOVED FROM THE ENDS OF THE STOCK BUMPER. THIS IS NOT NECESSARY TO MOUNT THE BUMPER.**

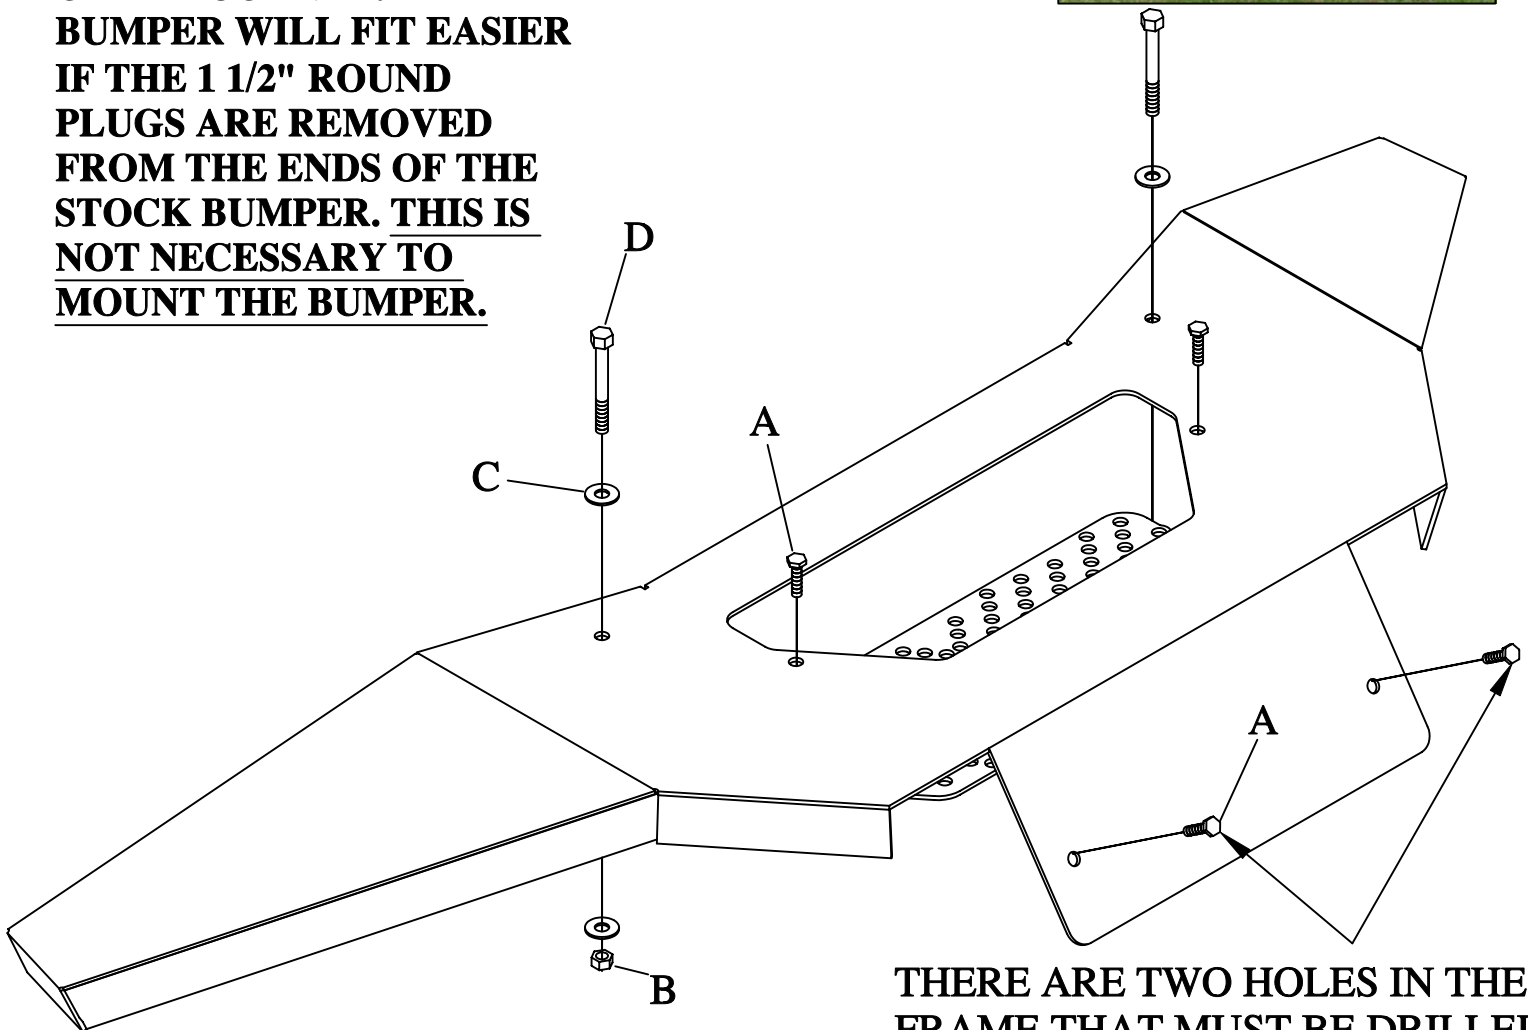

**THERE ARE TWO HOLES IN THE FRAME THAT MUST BE DRILLED OUT TO 7/32 FOR THESE TWO SCREWS.**