

- 2=5/16 X 1 1/4 U-BOLTS-A
- 4=5/16 LOCK NUTS-B
- 4=5/16 USS WASHERS-C
- 4=5/16 ROD CAPS
- 2=1/4 X 1 SQUARE
- YELLOW U-BOLTS-D
- 4=1/4 LOCK NUTS-E
- 4=1/4 SAE WASHERS-F
- 2=FGAR-2
- 4=RUBBER SNUBBERS





# # GR141

REAR POLARIS GUN RACK  
2010 RANGER 400 4X4

PLACE THE ROD CAPS ON ALL EXISTING THREADS THAT ARE LEFT ONCE THE BRACKET HAS BEEN MOUNTED...

THE BRACKET WILL MOUNT BEHIND THE DRIVER AND PASSENGERS HEAD IN THE CENTER.

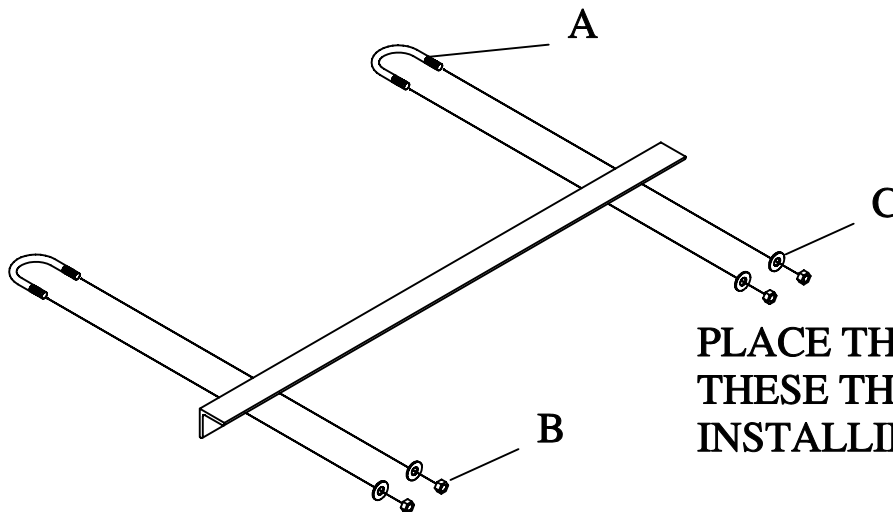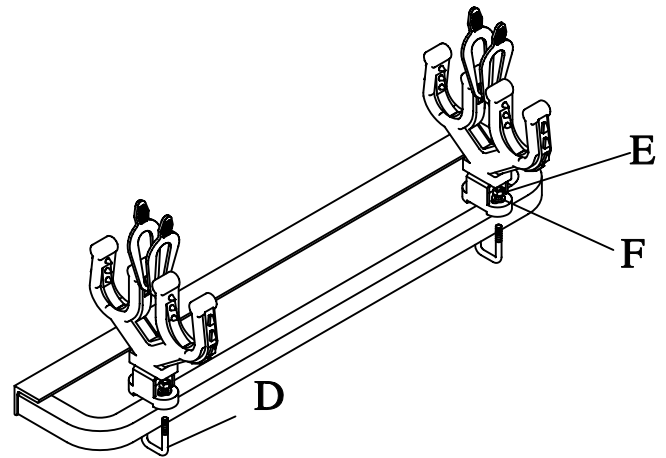

PLACE THE 5/16 ROD CAPS ON THESE THREADS AFTER INSTALLING..