


- 4=5/16 LOCK NUTS-A
- 8=5/16 SAE WASHERS-B
- 1=5/16X2 1/4 BOLTS-C
- 2=5/16X2 1/2 BOLTS-D
- 1=225 OVAL HOLE WASHER-E
- 2=3/16X1 1/4X1 1/4 RC-F
- 1=3/16X1X1 RC-G
- 1=5/16X1 1/4 BOLT-H

# SMI SAVANT MFG., INC.

## SP109-STL

HONDA 500 RUB. STEEL. SKID PLATE

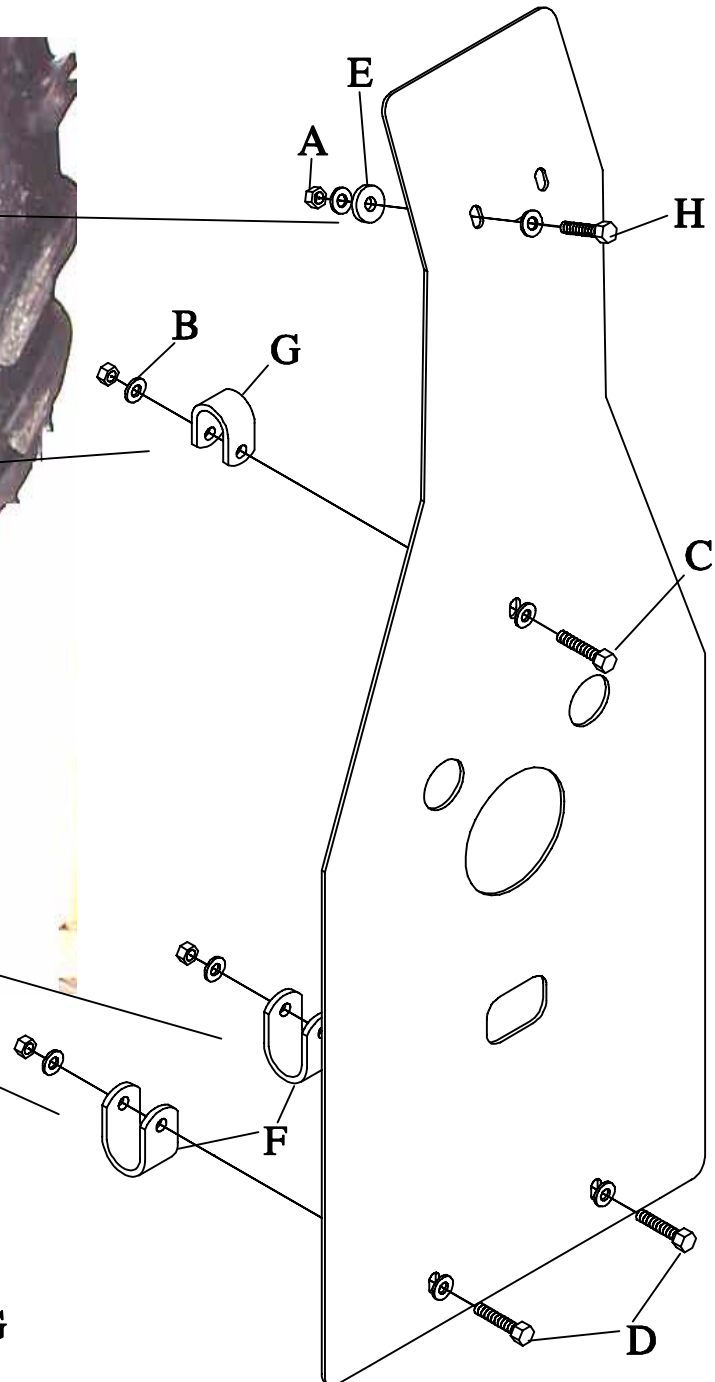

THE SIMPLEST WAY TO MOUNT THE SP109 IS TO STAND THE QUAD ON THE REAR RACK AND REMOVE THE ORIGINAL SKID PLATES AND BOLT AS SHOWN IN THE PICTURE.

USE THE PROPER EQUIPMENT IN LIFTING THE QUAD (CHAIN HOIST) OR ANY TYPE OF LIFTING EQUIPMENT.