


12=1/4 LOCK NUTS
12=1/4 SAE FLAT WASHERS
6=1/4 X 3/8 U BOLTS



THE SS127 ARE INSTALLED UNDER THE A ARMS.. ANY QUESTIONS CALL 1800-326-6880

THESE ENDS FACE TOWARD THE
INSIDE OF THE RIM!!!

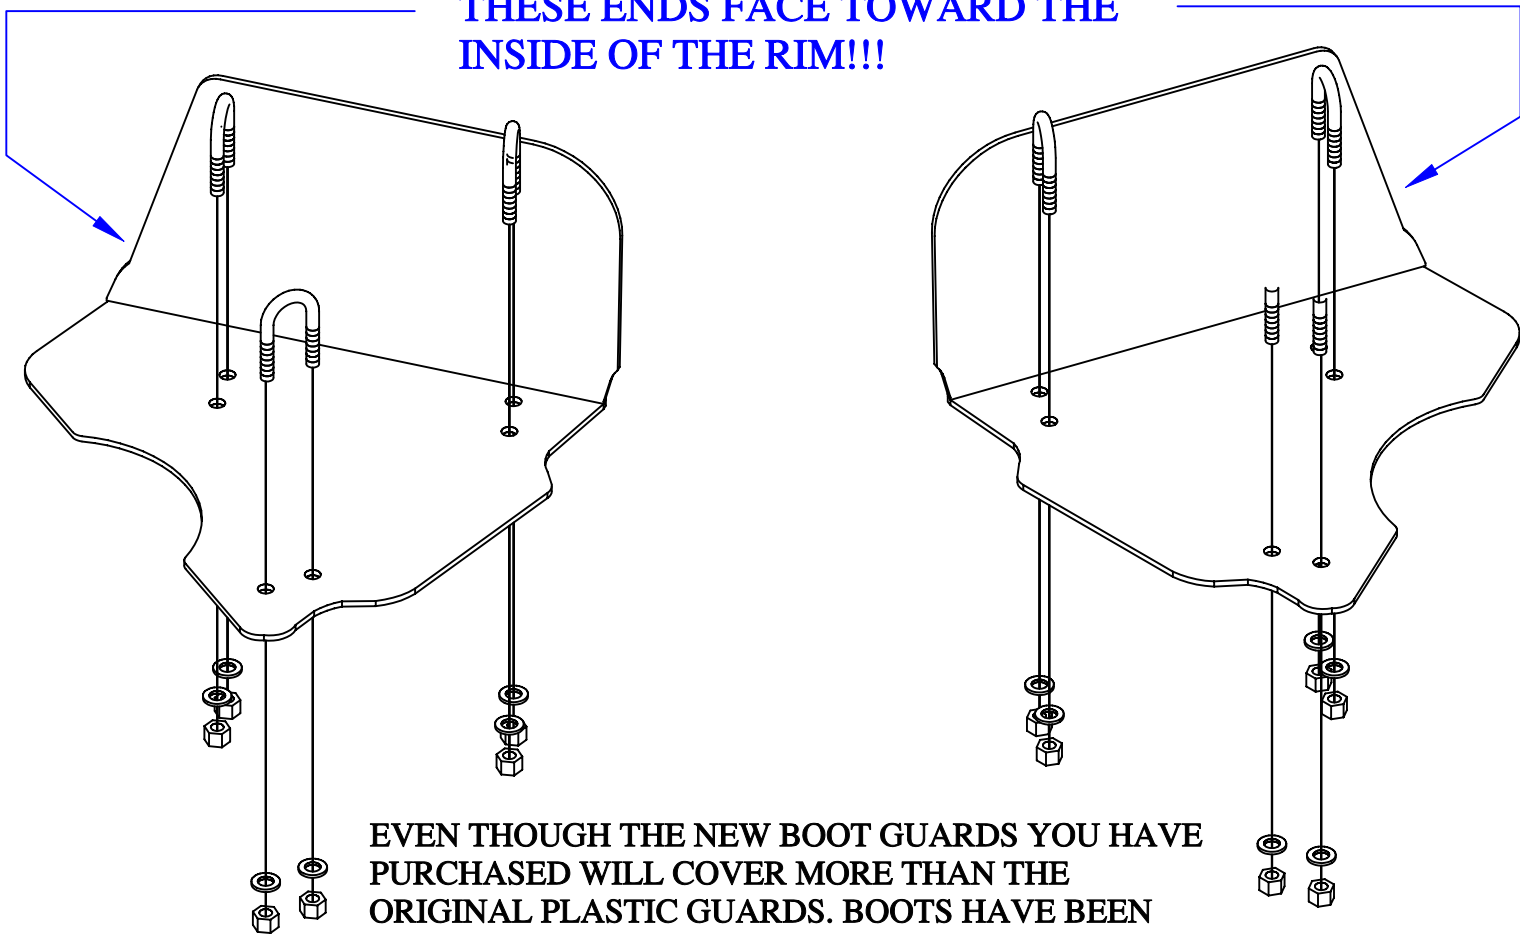

EVEN THOUGH THE NEW BOOT GUARDS YOU HAVE PURCHASED WILL COVER MORE THAN THE ORIGINAL PLASTIC GUARDS. BOOTS HAVE BEEN REPORTED TO BE TORN IN SOME CONDITIONS .DUE TO THE TURING RADIUS ON SOME OF THE NEWER ATV'S. THE BOOT PROTECTORS HAVE BEEN MANUFACTURED SMALLER TO ALLOW FOR A TIGHTER TURING RADIUS. SAVANT MFG. (STRONG MADE) DOES NOT WARRANTY AND TORN BOOTS.