


- 2= 1/4 X 3/4 U-BOLTS-A
- 6=6MM X 25MM X 1 BOLTS-B
- 4=1/4 LOCK NUTS-C
- 10=1/4 SAE WASHERS-D
- 8= #16 TANNER RIVETS-E
- 8=5/16 SAE WHASERS-F
- 6= 1/4 GALV. SPACERS 3/8 LONG-G




SS152H

SUZUKI KING QUAD 700 4X4 REAR STICK STOPPERS

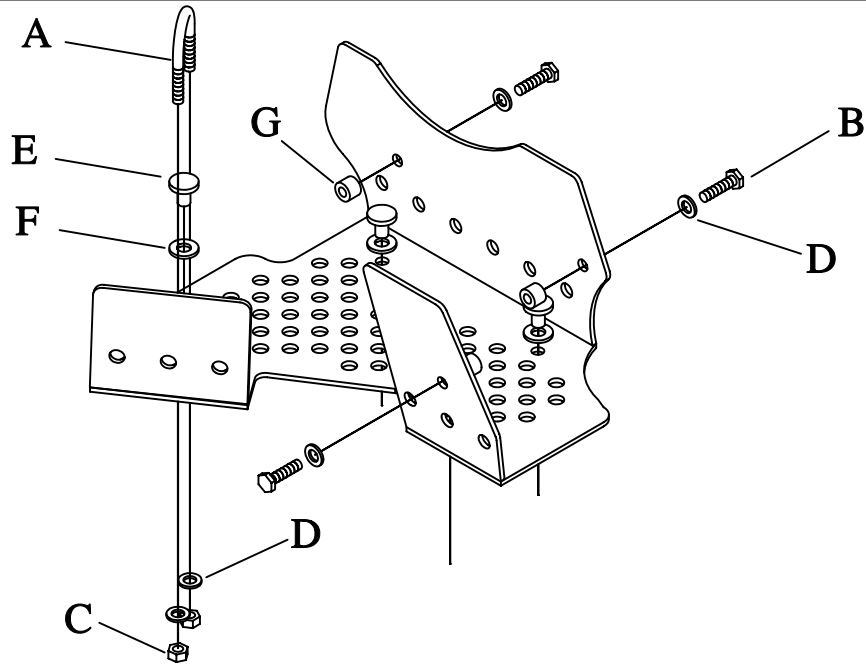

THIS END WILL FACE THE INSIDE OF THE RIM ONCE IT HAS BEEN MOUNTED.

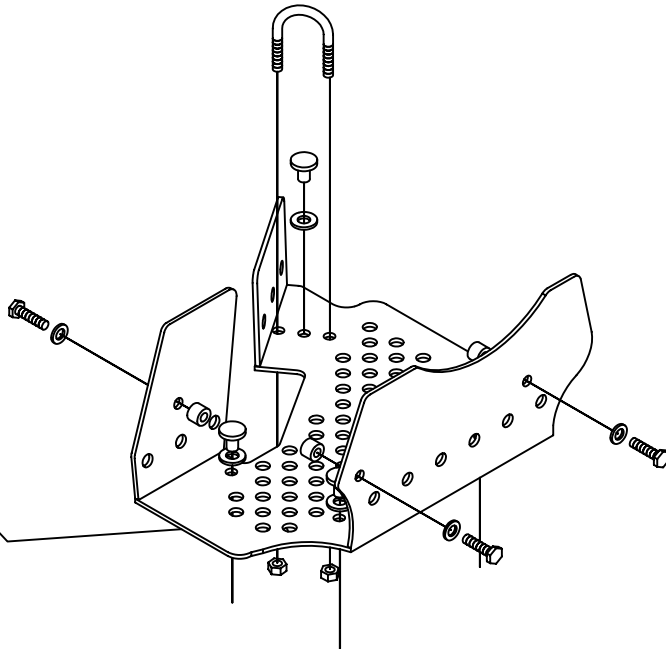

THE PROCESS WILL BE EASIER IF THE REAR WHEELS ARE REMOVED. TO DO THIS JUST PLACE A JACK UNDER THE HITCH AND LIFT OFF GROUND THEN REMOVE THE TWO WHEELS. REMOVE THE PLASTIC GUARDS AND INSTALL THE SS152H AS SHOWN HERE.