


- 4=1/4 GALV. SPACERS 3/4" LONG-A
- 6=5/16 X 3/4 BOLTS-B
- 4=5/16 X 1 1/2 BOLTS-C
- 10=5/16 LOCK NUTS-D
- 2=1" CHANNEL IRONS 7 1/2"-E



SS179H

FRONT GUARDS GATOR 620I XUV

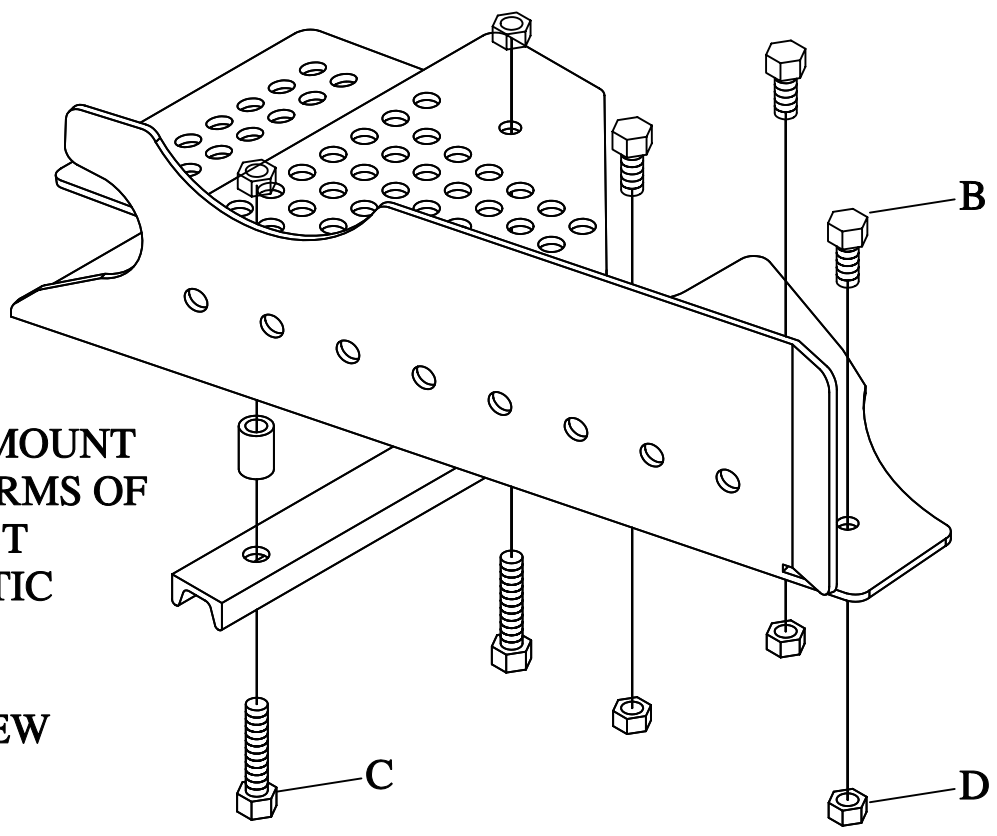

THIS GUARD WILL MOUNT ON TOP OF THE A-ARMS OF THE MACHINE. MUST REMOVE THE PLASTIC GUARDS FROM THE A-ARMS BEFORE INSTALLING THE NEW METAL GUARDS.

THIS END WILL FACE THE INSIDE OF THE RIM ONCE THE GUARDS HAVE BEEN MOUNTED ON TOP OF THE A-ARMS.

