

4=1/2 X 1 BOLTS(HHP5-050-0100)-A
4=7/16 USS WASHERS-B
2=1/4 X 1 BLACK TORX
HEAD SCREWS-C




IF DESIRED BY INSTALLER THEY
MAY DRILL THESE HOLES OUT TO
A 5/16 HOLE AND USE A 5/16 X 3"
BOLTS WITH 5/16 SAE WASHERS
AND 5/16 LOCK NUTS TO MOUNT
THE PLATE TO THE STOCK
BUMPER.

BG-30W

YAMAHA RHINO 660 450 FRONT BUMPER

REMOVE THE STOCK
PLASTIC MIDDLE GUARD
USE THE SAME STOCK
BOLTS AND INSTALL THE
MAIN BRACKET.

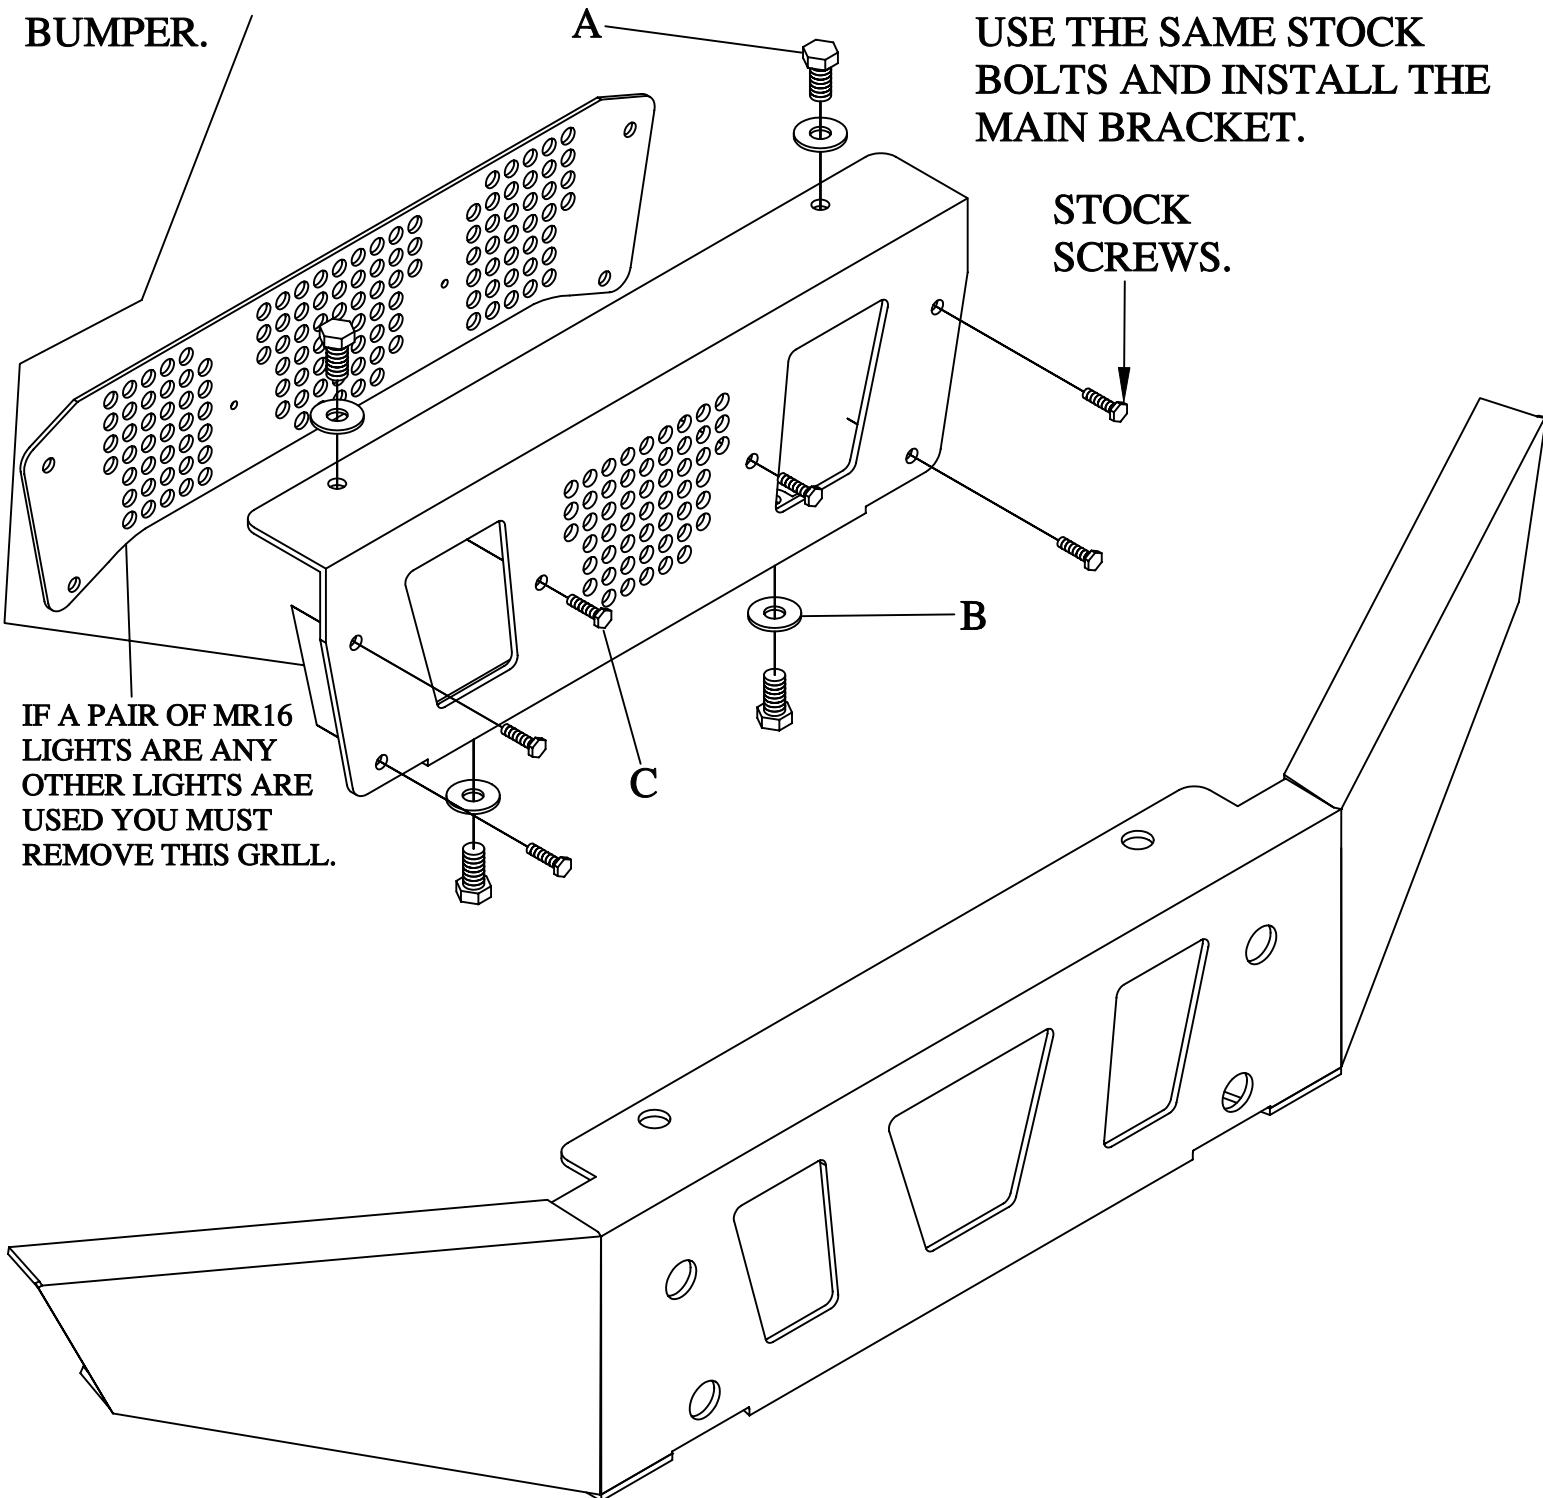

IF A PAIR OF MR16
LIGHTS ARE ANY
OTHER LIGHTS ARE
USED YOU MUST
REMOVE THIS GRILL.